

## 889T Advance Dual Line

The 889T Advance Dual Line incorporates a second retractable belt to provide maximum control for added security & safety. The second line of webbing helps to keep control of a queue by preventing people from ducking under the webbing.

### Features


- Post available in the full range of colours & finishes
- Modular cassette design offering four-point anti-tamper connection as standard
- Constant torque webbing retraction
- Three tape ends for user specified applications: Anti-tamper, Panic Break, Magnetic
- 2.3m to 3.65m webbing options in a variety of colours including printed messages
- Choice of four base options
- Accommodates the full range of sign holders

### Benefits

- Invaluable for keeping control of areas where children are, as the second line of webbing prevents them from running out of the queue
- Offers the flexibility to have one line of webbing with a printed message whereas the bottom one can have another colour or different message
- Keep control of your customers & employees
- The ultimate in flexibility, the Tensabarrier® is easy to set up
- Easily achieve the optimum queue layout for your floor space
- Reduces customer stress by removing ambiguity as to where the customer should queue and by providing separation between individuals and queue lines
- Durable & hardwearing dye print that does not scratch or deteriorate
- Digitally printed webbing offers branding opportunities

### Applications

- Great in airports, warehouses, schools and leisure attractions

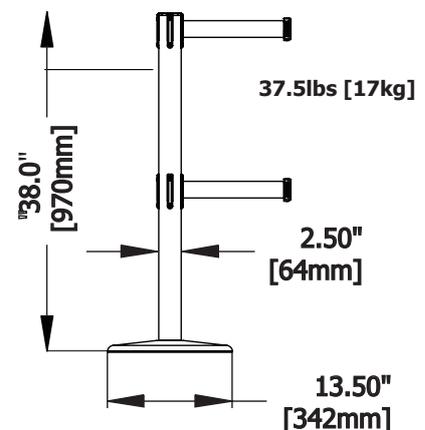

## Base Options

### ➤ Universal Base (889T2U)

Cast iron slim profile base with a pressed steel cover, which is available in all metals & finishes. A super heavyweight base is standard and optional rubber floor protectors can be purchased.

height	970mm	tube O.D.	64mm
base dia.	342mm	weight	17kg

### ➤ Basics Base (889T2B)

Cast iron base covered by a highly durable NoScuff™ ABS plastic cover. The base is available in Black. However further colours are available on request.

height	970mm	tube O.D.	64mm
base dia.	337mm	weight	10kg

### ➤ Fixed (889T2F) & Removable (889T2R)

Provides added stability in applications with established traffic patterns and ensures that the post location is always correct with minimum footprint. Post can be surface fixed or socket mounted, so drilling of floors is required.

height	950mm 889T2F 955mm 889T2R	tube O.D.	64mm
base dia.	136mm	weight	5kg

### ➤ eXpressions Base (889E)

Cast iron eXpressions base complements any decor with a dark gray anti-scuff outer ring and inlay finish options including polished chrome, satin chrome and any powder coated finishes.

height	965mm	tube O.D.	64mm
base dia.	345mm	weight	11kg